



www.legends-yamaha-enduros.com



For the beginning motorcycle rider, or for anyone looking for a sporty little in-town commuter, there is no machine better than Yamaha's RD60.

The Torque Induction intake system, standard on all Yamaha two-strokes, improves the performance of the machine at the city

speeds you'll normally be travelling.


And the cast iron cylinder minimizes engine noise.

A primary kick starter makes the RD60 easy to start without having to search around for neutral. And Autolube® premixes your gas and oil. (In fact, the RD60 holds over a quart

of oil and over two gallons of gas, which means you can take this machine many pleasurable miles before needing a ref.)

So if what you want is a dependable motorcycle that's fun to ride and easy to maintain, here it is. The RD60.


Features

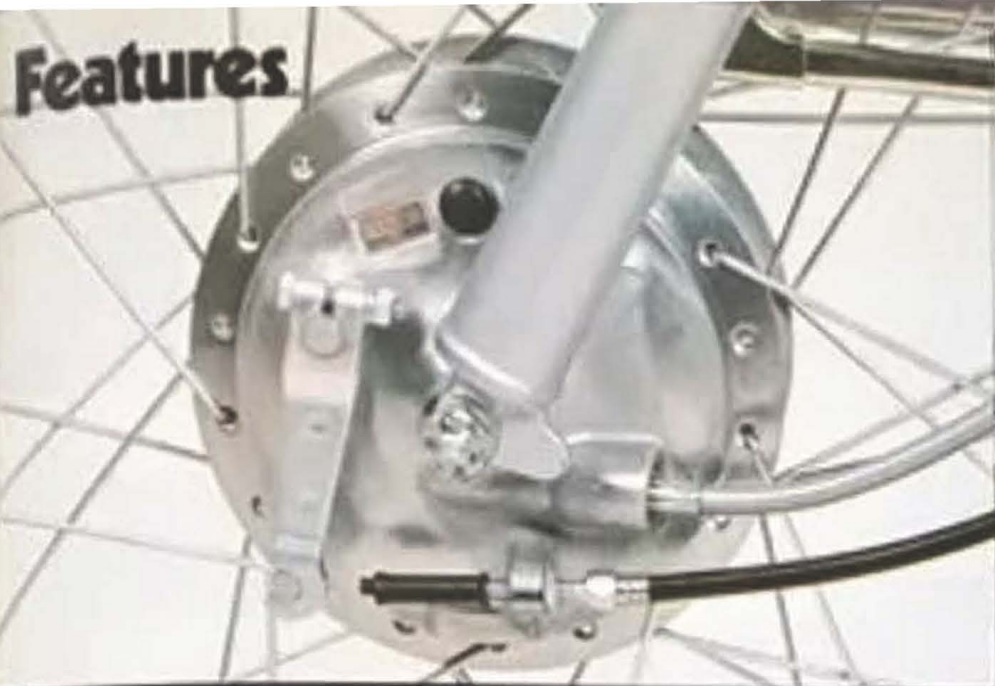

Powerful front brake stops fast, and is water and dust resistant. Long travel front forks soak up the hardest bumps. Rear shocks are adjustable to load and the condition of the road.



Torque Induction. Yamaha's unique intake system, utilizes a reed valve to feed the engine the exact amount of fuel and air it needs. The result is that at low rpm's, horsepower is increased.

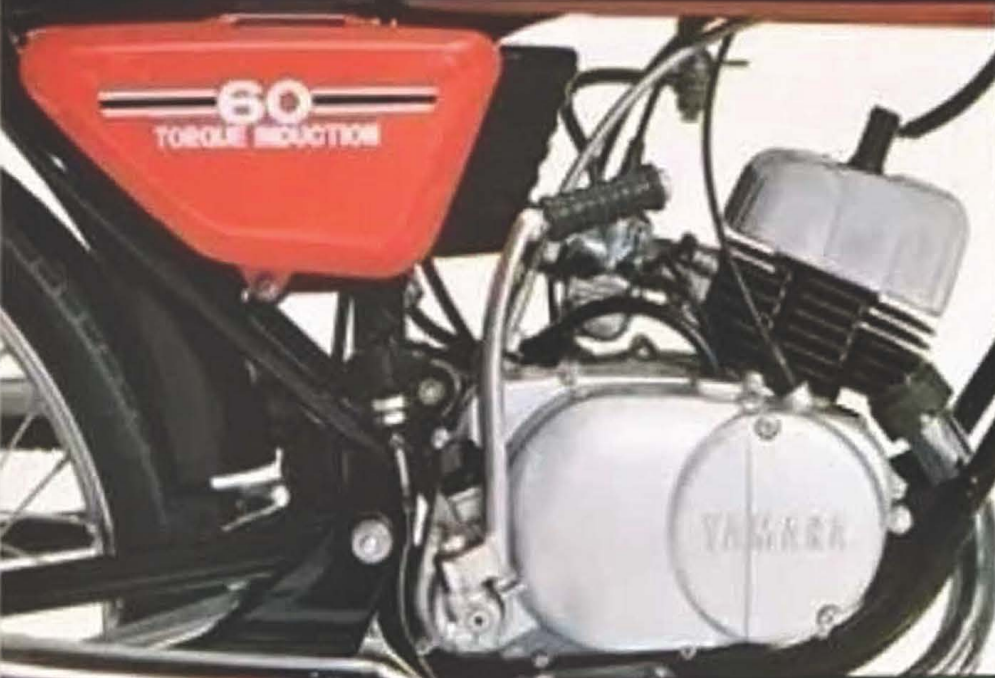

Primary kick starter lets you start the engine in any gear. So you don't have to hunt around for neutral first. The five-speed gearbox gives the R060 amazing flexibility for its size.



Autojet automatically injects oil into the fuel mixture, eliminating the need for premixing. And, since it constantly adjusts the flow of oil to engine load and speed, it helps extend engine life.



R060B

PERFORMANCE

| | |
|-----------------------------|----------|
| Max. speed range | |
| Min. turning radius | |
| Min. braking distance | 23.4 ft. |

ENGINE

| | |
|--------------------------|------------------------------------|
| Type | 2-stroke, Torque Induction, Single |
| Displacement | 55 cc (3.36 cu. in.) |
| Bore & Stroke | 1.654 x 1.500 in. |
| Compression ratio | 6.9:1 |
| Max. Torque | 3.4 ft.-lb. @ 5000 rpm |
| Lubrication system | Autolube* |
| Starting system | Primary kick starter |
| Ignition system | Flywheel Magneto |
| Transmission | 5-speed gearbox |

DIMENSIONS

| | |
|-----------------------------|----------|
| Overall length | 71.9 in. |
| Overall width | 24.8 in. |
| Overall height | 38.0 in. |
| Wheelbase | 46.7 in. |
| Min. ground clearance | 5.9 in. |

FUEL TANK

| | |
|----------------|---------------|
| Capacity | 2.1 U.S. gal. |
|----------------|---------------|

OIL TANK

| | |
|----------------|---------------|
| Capacity | 1.1 U.S. qts. |
|----------------|---------------|

TIRES

| | |
|-------------|-------------|
| Front | 2.50-17-40H |
| Rear | 2.50-17-40H |

* Specifications subject to change without notice.

**Someday,
you'll own a Yamaha.**

YAMAHA INTERNATIONAL CORPORATION

6600 Orangeflour Ave., Buena Park, California 92620

Printed in Japan LIT-11026-14-00



www.legends-yamaha-enduros.com