

RD200





The RD200 has been called the perfect small motorcycle. It is ideal for just about any kind of riding you want to do, including just introducing yourself to motorcycling.


No other bike in its class offers as many advanced styling and performance features as the RD200. The complete instrumentation and

lighting package includes a large sealed-beam headlight for bright, automotive type illumination. Autolube® saves you the trouble of premixing your oil and gas. There's an electric starter that makes it easy for the beginning rider. A front disc brake gives you extra stopping power on city streets. And there's


Torque Induction, Yamaha's exclusive reed-valve intake system, which gives the RD200 remarkable pulling power at low speeds.

By every important measure—performance, reliability, comfort and ease of maintenance—the RD200 is the finest motorcycle in its class.

Features

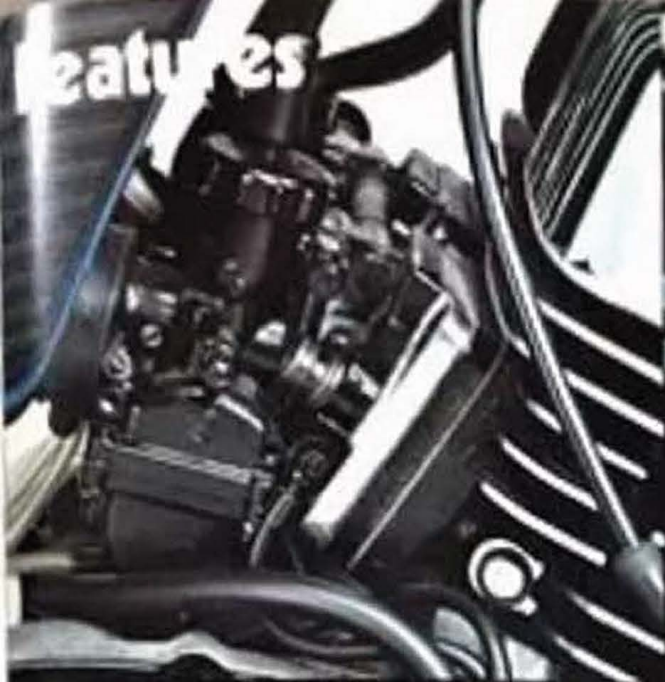

Torque Induction, Yamaha's unique intake system, employs a needle-valve to feed the engine the exact mixture of fuel and air it needs. The result is more horsepower, particularly at low rpm's.

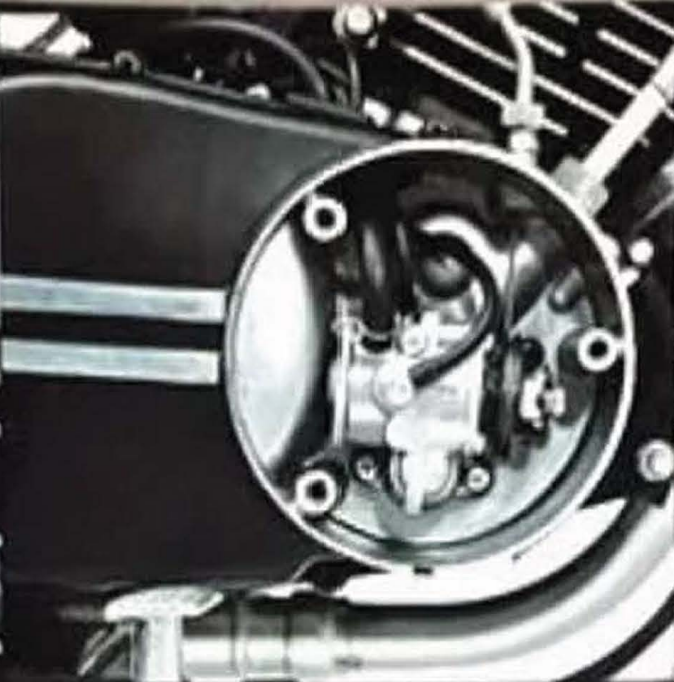

Autolube automatically injects oil into the fuel mixture, eliminating the need for premixing. And, since it constantly adjusts the flow of oil to engine load and speed, it helps extend engine life.



Pushbutton electric starting fires up the RD200's engine at the touch of a finger. Auxiliary kick starter is primary type, so you can start the engine in any gear, without hunting for neutral.

www.legends-yamaha-enduro.com




Full instrumentation and lighting package includes a large, sealed-beam headlight for bright, automotive type illumination.



Close ratio, five-speed transmission helps keep you within the power band in virtually all riding situations.



Adjustable rear shocks can be set at three different positions, according to the load you're carrying or the condition of the road.

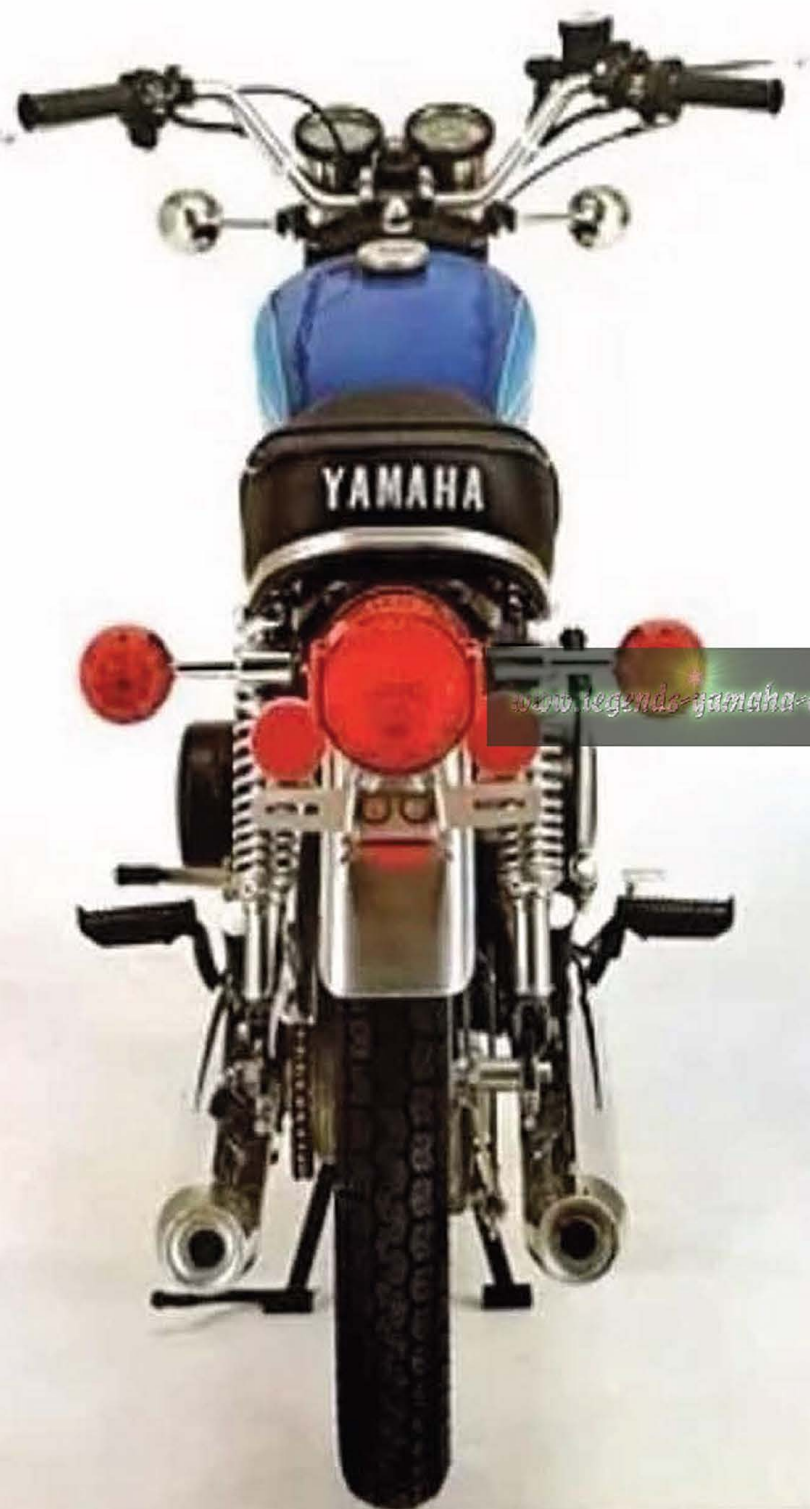

www.legenda-yamaha-enduro.com

RD200C ENGINE	
Type	4-stroke twin
Displacement	196 cc
Bore and Stroke	52 x 46 mm
Compression ratio	7.1:1
Maximum torque	15.7 ft.-lbs. @ 7,000 rpm
Carburetion	121 Teikin carb
Ignition	10-Bolt
Starting	Kick & Electric
Lubrication	Automatic
Transmission	5-spd
CHASSIS	
Overall length	76.6"
Overall width	29.1"
Overall height	39.6"
Wheelbase	49.0"
Minimum ground clearance	6.1"
Dry weight	256 lbs.
Fuel tank capacity	3.0 gal.
Oil tank capacity	2.1 qts.
Suspension	
front	Telescopic fork
rear	Swing arm
Brakes	
front	Hydraulic disc
rear	Drum
Tires	
front	2.75 x 18
rear	3.00 x 18

* Specifications subject to change without prior notice.

**Someday,
you'll own a Yamaha.**

YAMAHA INTERNATIONAL CORPORATION
 6600 Orangeford Ave., Buena Park, California 90620
 Printed in Japan LIT-11038-09-00



1976