

RD-2000

www.legends-yamaha-enduros.com





www.legends-yamaha-enduros.com

The stylish RD200 is designed as the ideal motorcycle for today's new generation of riders.

The perfect answer to families looking for an alternative to the high cost of gasoline, the RD200 combines the easy-handling

desired by the beginning rider with the responsiveness necessary to satisfy the enthusiast. As an economical family machine, for use in running errands or for commuting, the RD200 has a lot to offer . . . from electric starting, to the quickness and

speed necessary on today's busy highways.

From the standpoints of size, features, reliability, and quality engineering, the RD200 fits the description of the perfect all-around motorcycle.

Features



Autolube automatically injects oil into the fuel mixture, eliminating the need for premixing. And, since it constantly adjusts the flow of oil to engine load and speed, it helps extend engine life.



Adjustable rear shocks can be set at three different positions, according to the load you're carrying or the condition of the road. Yamaha's brakes have traditionally set the industry standard for sure stopping.



Close ratio, five speed transmission helps keep you within the power band in virtually all riding situations.




Pushbutton electric starter fires up the RD200's engine at the touch of a finger. Auxiliary kick starter is primary type, so you can start the engine in any gear, without hunting around for neutral.



www.legends-yamaha-enduros.com

Torque induction. Yamaha's unique intake system, utilizes a reed valve to feed the engine the exact amount of fuel and air it needs. The result is more horsepower, particularly at low rpm's.

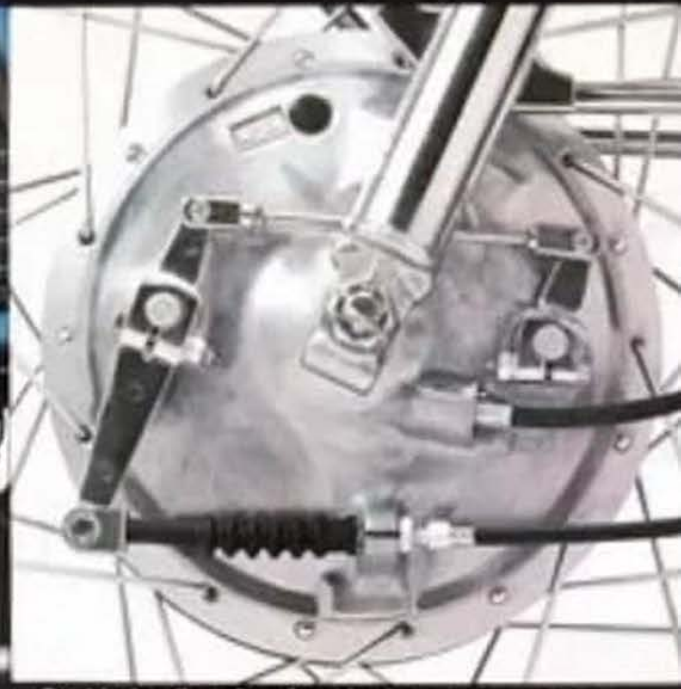

Double leading shoe front brake has tremendous stopping power, and is dustproof and waterproof. The enduro-type front forks will soak up the hardest jolts. Without bottoming.



www.legends-yamaha-enduros.com

RD3000

PERFORMANCE

Max. speed (km/h)	180
Min. turning radius	30.7 m
Min. braking distance	45.8 (101.1) m

ENGINE

Type	2 stroke, 4 valve, 4 stroke induction, Parallel Twin
Displacement	296 cc (18.11 cu in.)
Bore & Stroke	73.0 x 57.0 mm (2.874 x 2.244 in.)
Compression ratio	11.1
Max. torque	18.2 Nm (13.3 ft-lb)
Lubrication system	Wet Sump
Starting system	Electric and Primary Kick Starter
Ignition system	CDI
Transmission	5-Speed

DIMENSIONS

Overall length	2075 mm (81.7 in.)
Overall width	750 mm (29.5 in.)
Overall height	1085 mm (42.7 in.)
Wheelbase	1495 mm (59.0 in.)
Min. ground clearance	161 mm (6.3 in.)

FUEL TANK

Capacity	30 U.S. gal (113.5 l)
----------	-----------------------

OIL TANK

Capacity	2.1 U.S. gal (8.0 l)
----------	----------------------

TIRES

Front	2.75-16-4PR
Rear	3.00-16-4PR

Specifications subject to change without prior notice.

**Someday,
you'll own a Yamaha.**

YAMAHA INTERNATIONAL CORPORATION
 6600 Orangeflour Ave., Buena Park, California 92620
 Printed in Japan LIT-11009-17-00



1975