




WHAT ALL THAT RACING IS GOOD FOR.

RD350

YAMAHA

 YAMAHA

Never has the invaluable experience of success in worldclass competition been more dramatically expressed in road-going machines than in Yamaha's new two-strokes. The RD350 is a breakthrough in motorcycle design.

Based directly on Yamaha's TZ road racers, the RD features a liquid-cooled

piston-ported two-stroke twin cylinder engine and the Yamaha monoshock system which has taken the TZ and YZR road racers to repeated world titles.

The RD has the slim, lean look of a racer. Yamaha's unique experience on the racetrack

has led to the development of a motorcycle with broad, dependable safety margins. The motorcycle that wins races is not just the fastest motorcycle.

It is, inevitably, the best handling, best braking, most stable motorcycle under the most widely varying stresses. In short, a safe motorcycle.

Engine and gearbox. The RD350 displaces 347 cc (bore and stroke 64.0 x 54.0 mm) and develops a maximum power of 47 Hp at 8500 rpm. Maximum torque is (4.1 kg-m) at 8000 rpm.

The engine is a liquid-cooled two-stroke twin equipped with a frontal radiator. Carburation is through twin Mikunis. Gearbox is six-speed; clutch

wet multiplate; final drive by chain.

(Features) The exhaust is matt-black expansion chamber style, upswept for additional ground clearance. The wheels are new Yamaha Italic[®] design, cast from alloy and finished in silver and matt-black.

The brakes are double disc front and waterproof, dust-proof drum rear.




Instrumentation is comprehensive and includes sports tachometer and full range of warning lights. Self-cancelling indicators are fitted as standard.

The rear suspension is Yamaha's all-conquering Monoshock. A triangulated rear sub-frame carries

the wheel, which is suspended by a long spring and shock absorber unit running under the tank to the steering head.

The system provides not only long rear-wheel travel, but more positive damping, which allows the wheel to follow more closely and more safely the variations in road surface.

The front suspension is by long travel forks equipped with non-stick Teflon bushes.

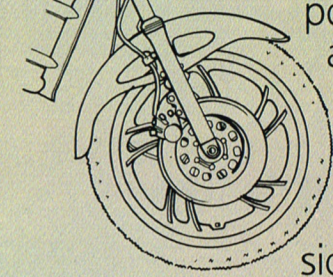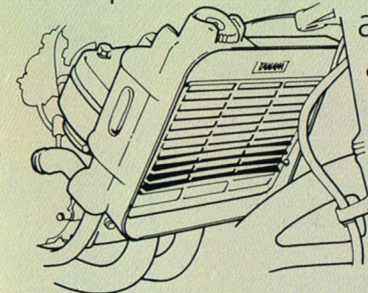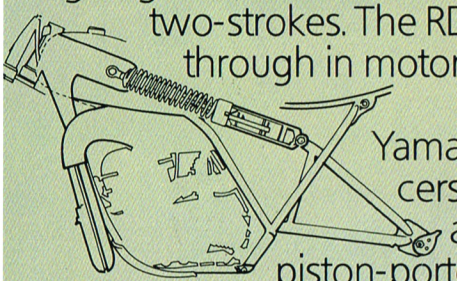

YAMAHA'S RD350: THE NEW, LIQUID-COOLED, 2-STROKE. WHAT COULD BE IMPROVED HAS BEEN IMPROVED.



RD350 L/C*

ENGINE

Type	2-stroke, twin cylinder, LC
Displacement	347 cc
Bore/stroke	64.0 x 54.0 mm
Compression ratio	6.2 : 1
Max. horsepower	34.5 kW (47 Hp)/8500 rpm
Max. torque	40.2 Nm (4.1 kg-m)/8000 rpm
Ignition	C.D.I.
Starting system	Kickstarter
Gearbox	6-speed

DIMENSIONS


Wheelbase	1365 mm
Min. ground clearance	165 mm
Seat height	785 mm
Weight (Net)	143 kg
Fuel tank capacity	16.0 lit
Oil tank capacity	1.6 lit
Tires front	3.00-18-4PR
Rear	3.50-18-4PR
Brakes front	Double disc 267 ϕ mm
Rear	Drum

* Specifications subject to change without notice.



YAMAHA MOTOR N.V.

Postbus 7829 PROF. E.M. Meyerslaan 3
Amstelveen (Amsterdam), Holland

LIT-3MC-0107474-80E 55.4 x 51  (イギリス向) Printed in Japan