

YAMAHA 125 SINGLE ENDURO MODEL AT-1



www.legends-yamaha-enduros.com

Your introduction to the great sport of cross-country riding. Meet the new Yamaha AT-1, an exciting 125cc electric starting trail machine that follows in the footsteps of Yamaha's unchallenged DT-1. Lighter and easier to handle, the AT-1 is ideal for the rider who is just entering the fun-filled world of cross-country riding.


The heart of this machine is a newly developed aluminum single cylinder engine that features Yamaha's famed 5-port design. It is kept running cool and clean with the Autolube automatic oil injection system.

Rugged trail features include all of those proved best by the larger DT-1: special front forks that smooth out the roughest trail, rugged 5-speed transmission for power as you need it, separate tachometer and speedometer instruments that can be reset by tenth. And a new large non-slip seat.

The AT-1 also meets all federal safety standards with side reflectors on front forks and tail light assembly, as well as with a tail light that is activated by either front or rear brake. U.S. Forestry approved spark arrestor is also standard equipment.

MODEL AT-1

Available Color: Pearl White

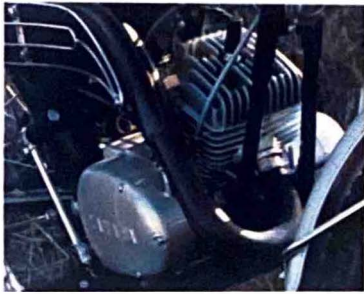

5-PORT ENGINE WITH ELECTRIC STARTER

The additional ports, in the aluminum single cylinder engine used by the AT-1 delivers an overall 10-percent increase in power. Peak performance is assured by the Yamaha autolube automatic lubrication system. The popular electric starter is also standard equipment on the AT-1.



RUGGED TRAIL FEATURES

These include a sturdy lightweight frame, special travel forks, engine guard, a maximum amount of ground clearance, large non-slip seat and separate tachometer and speedometer instruments.



NEW STANDARDS IN SAFETY

Sure-gripping trail tires, water and dust-proof brakes, and large head and tail lights are all standard. In addition, the AT-1 meets new federal safety standards with side reflectors on forks and tail light assembly, and also features a brake light that is activated by either front or rear brake.

SPECIFICATIONS

PERFORMANCE

Max. speed range	60 mph plus
Climbing ability	30 degrees
Min. turning radius	74.8 in.
Min. braking distance	58.3 ft. @31 mph

ENGINE

Type	2-stroke, 5-port, Single
Displacement	123 cc (7.51 cu. in.)
Bore & Stroke	56 x 50 mm (2.205 x 1.969 in.)
Compression ratio	7.1 : 1
Max. horsepower	11.5 BHP @7,500 rpm
Max. torque	8.5 ft-lb @6,000 rpm
Lubrication system	Autolube

Starting system	Electric & Primary Kick
Transmission	5-speed gearbox

DIMENSIONS

Overall length	77.2 in.
Overall width	35.8 in.
Overall height	42.9 in.
Wheelbase	50.6 in.
Min. ground clearance	8.9 in.
WEIGHT (Net)	218 lbs.

FUEL TANK CAPACITY	1.9 gal.
OIL TANK CAPACITY	1.3 qt.

TIRES front	3.00-18-4PR
rear	3.25-18-4PR

* Specifications subject to change without notice.



YAMAHA

SINCE 1887

INTERNATIONAL CORPORATION

P.O. Box 54540, Los Angeles, California 90054 / Hawaii: Yamaha of Hawaii Inc., 1366 Dillingham Blvd., Honolulu, Hawaii 96817 / Canada: FRED DEELEY LTD., 854 West 6th Street, Vancouver 9, British Columbia, Canada.

www.legends-yamaha-enduros.com

Printed in Japan Ref. No. MCL125 AT-1 44 2 x 200D